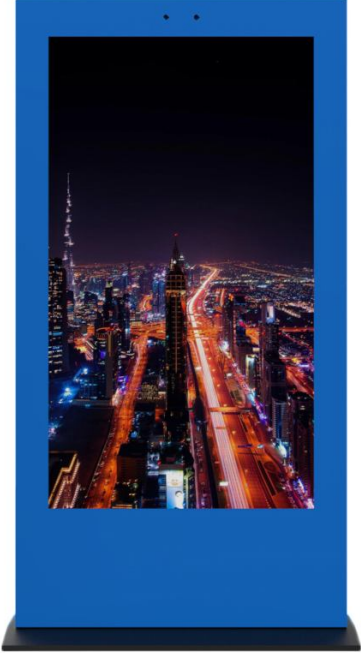


Outdoor 75 inch Floor-standing LCD Kiosk

KEY FEATURE	PICTURE
<p>A+ LCD panel UHD 3840x2160 compatible to 1920x1080 7*24 Hour working uninterrupted</p> <p>Energy-saving LED backlight (2500 nits) Weatherproof, Sun-readable, Auto-light sensor Anti-dust, anti-thunder, Vandal-proof (Locks&Key), Anti-radiation, Anti-electromagnetic Protective: AR 6mm tempered glass</p> <p>Optional: 1. Plug and Play Network Touch 2. Fan-cooling≤IP55 Air-conditioning≥IP65 3. Linux, Android, Windows 4. Grey, White, Black...Customizable</p>	

Spec Parameter Table:

Digital Signage Size		75"
Model Number		ST-HW750LD-A
PANELS	Panel Type	A+ LCD Panel 75 inch LG (IPS)
	View Area	1649.7x927.9mm(W*H)
	Show Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	UHD 3840x2160 compatible to 1920x1080
	Show Color	16.7M/1.07B 87% (CIE1931)
	Brightness	2500 nits Sunlight-readable
	Contrast Ratio	1400:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤ 5ms
	S-System	PAL / NTSC / SECAM
Life Expectance	60000 Hours	
Environment	Work Temp	-30°C to 55°C
	Storage Temp	-35°C to 60°C
	Work Humidity	5% to 95%
	Storage Humidity	5% to 95%
	Heat-control	Industrial Fan-cooling Air-conditioning
	Protective Glass	AR 6-8mm Laminated and Tempered glass
	Protective Level	IP55 IP65

HARDWARE	Speaker	2*10W Stereo
	Control Interface	USB, SD Card, HDMI, VGA, DVI, RJ-45, WIFI, 4G
	Support Project	Plug and Play, Network, Touch
	Dimension	1220*250*2400 MM (REFERENCE)
	Whole Color	Silver, Grey, White, Black...customizable
	Shell Material	cold-rolling metal plate + Special outdoor powder paint
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Gross Weight	298 KG
	Accessories	the Remote Control, AC Power Cord, Key, Rack, Instruction, Approval Certificate, Warranty Card
FUNCTIONS	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Play Mode	Horizontal, Vertical, Full Screen, Split Screen
	Log Management	Supportive to terminal log and playlist log
	Power Mode	Time-setting On or Off Manual
POWER	Voltage	AC 100V - 240V
	Consumption	800W – 2500W (Due to the heat-control system)
	Standby	≤ 3W

Illumination Drawing:



(Depth could be various depending on the Heat-control equipment.)

PHYSICAL PICTURE (for REFERENCE):



DECLARE:

Final explanation belongs to Shenzhen SUNTUNE Technology Co., Ltd.