


SUPER NARROW BEZEL 55" LCD Video Wall System

KEY FEATURE	PICTURE
<p>Panel: A+ DID panel 55 inch</p> <p>Bezel seam: 3.5mm, Brightness:500nits Backlight: LED Color: 16.7M 178° wide view angle. Response time: ≤ 5ms. Easy-going modular design</p> <p>7*24 uninterrupted working. Control via IR Remote and RS232</p>	

Interface Figure




Spec Parameter Table:

Model NO.		ST-DID5501-DL
P A N E L	Panel type	A+ DID Panel 55 inch
	Show size	1209.6×680.4 mm (W*H)
	Show ratio	16:9
	Backlight	WLED
	Resolution	1920×1080
	Color	1.06B (8bit)
	Brightness	500cd/m ²
	Contrast ratio	3500:1

	Visual angle	178°(H) / 178°(V)
	Response time	≤5ms
	Life expectance	60000 hours
	Bezel seam	3.5mm (Up/Down: 1.7/1.8; Left/Right: 1.8/1.7)
I/O INTERFACE	VGA	1
	DVI	1
	HDMI	1
	YPbPr in	1
	Composite-video in	2(BNC×2)
	Composite-video out	1(BNC×1)
	RS232 in	1 (RJ45 converter)
	RS232 out	2 (RJ45 converter)
INSTALL	Wall mount, Floor-standing, Cabinet, Rack, ect	
OPERATION	Power Voltage	AC100-240V, 50 / 60HZ
	Consumption	≤210W
	Working temp	0°C~60°C
	Storing temp	-20°C~60°C
	Humidness	5%~95%
CONCERNS	Unit Dimension	1213.5×684.3×129 (mm)
	Unit Color	Black
	Housing Material	Solid cold-rolled metal crate
	Certificates	ISO9001/CE/FCC/RoHS etc
	Net weight	≤ 35 KG

DESIGN (Depth might be various from 129mm to 139mm due to different housings)

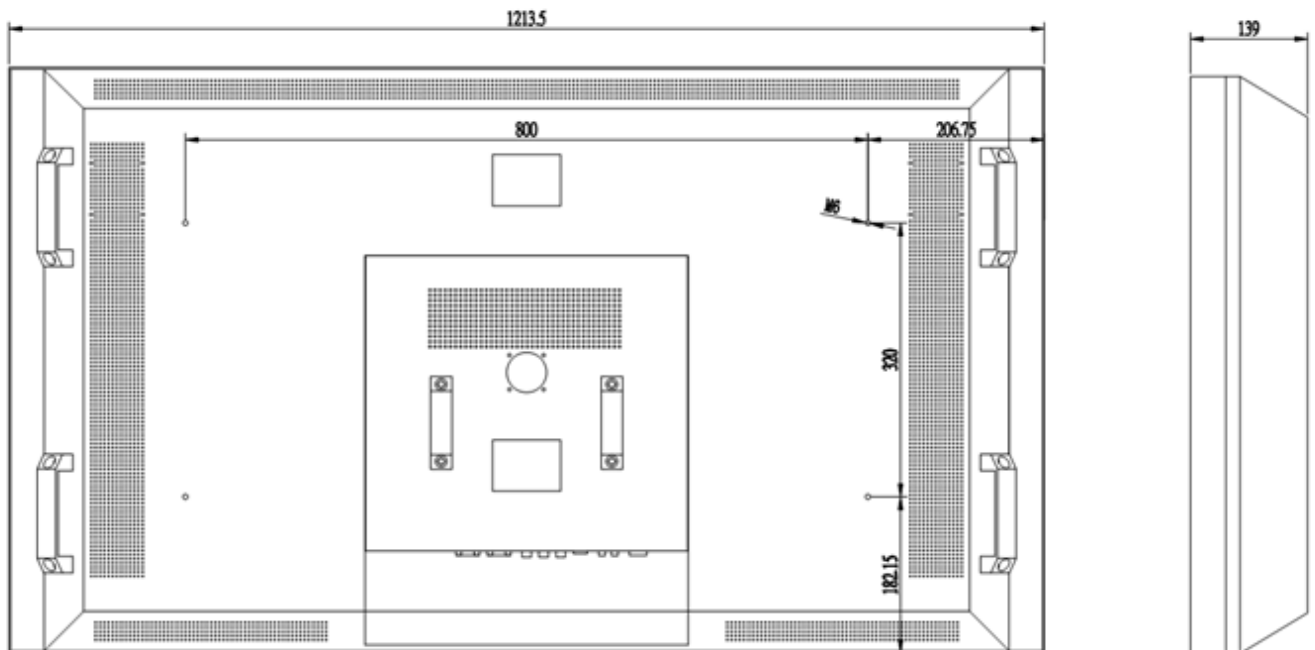

PLAY MODE

Full Displaying



Individual Displaying



Roaming Displaying



Image-in Displaying



Ways for installation



WALL Mount



Front-maintenance



Floor Standing



Cabinet



DECLARE:

Pictures and Parameters here are for reference alone. All standardized to the physical DID panel. The final explanations belong to SUNTUNE Inc.

